

Snell

AMC 550mp
FLUSH-MOUNT
SURROUND



VERSATILE FLUSH-MOUNT SPEAKER SELECT FOR DIFFUSE OR DIRECT OPERATION

The AMC 550mp is a high-performance, surround speaker with a selectable radiation pattern. The AMC 550mp can be either a diffuse dispersion pattern dipole or can radiate with a wide dispersion direct-pattern, hence its designation "mp" (for multi-pattern). In the diffuse mode, the AMC 550mp directs its energy away from the listening area, performing like an array of movie theater surround speakers. This creates a diffuse, lifelike ambient soundfield. In the direct mode the AMC 550mp functions as a wide dispersion direct radiator, perfect for localized surround effects or wide coverage front channel use. Voiced to match all Snell speakers, the AMC 550mp mounts flush and virtually disappears in the listening room.

AMC 550mp

SPECIFICATIONS

Frequency Response
80Hz-20kHz ± 3 dB

Recommended Amplifier Power
10 to 150 watts

Nominal Impedance
8 ohms

Sensitivity
85dB

Tweeter
Two 2 $\frac{1}{2}$ -inch (65mm) polymer treated

Bass Unit
5 $\frac{1}{4}$ -inch (135mm) copolymer with butyl rubber surround

Crossover Point
900Hz 12 dB/octave slope


Grille
Perforated metal

Outside Dimension
8 $\frac{1}{4}$ " h x 15 $\frac{1}{8}$ " w (210 x 384mm)

Rough Opening Requirements
7 $\frac{1}{2}$ " h x 14 $\frac{1}{8}$ " w
(190 x 358 x 95mm)

Weight/Pair (Shipping)
14 lbs. (6.4kg)

Finish
Matte white, suitable for painting

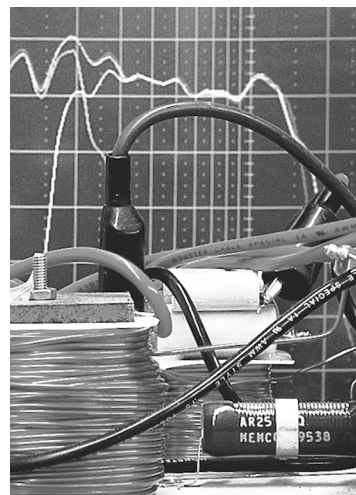

Hand Tuning

Our technicians rigorously match our systems to within ± 1.0 dB of the Master Reference

Snell

143 Essex Street
Haverhill, MA 01832
978-373-6114 phone
978-373-6172 fax

Covered by patents issued and or pending. Specifications subject to change. ©1999 Snell Acoustics.